



## OPzV3000 (2V3000AH) Tubular GEL Battery



### Specification

Nominal Voltage	2V	
Capacity	3000.0Ah@10hr to 1.80V/cell	
Dimension	Length	576±3mm (20.7 inches)
	Width	212±3mm (8.35 inches)
	Container Height	772±3mm (30.4 inches)
	Total Height (with Terminal)	807±3mm (31.8 inches)
Approx Weight	Approx 220.0 kg (485 lbs)	
Container Material	ABS	
Rated Capacity	3000 AH/300.0A	(10hr, 1.80V/cell, 20 /68 )
	2565 AH/513A	(5hr, 1.75V/cell, 20°C/68°F)
	2262 AH/754A	(3hr, 1.75V/cell, 20°C/68°F)
	1697 AH/1697A	(1hr, 1.60V/cell, 20°C/68°F)
Max. Discharge Current	24000A (5s)	
Internal Resistance	Approx 0.18 mΩ	
Operating Temp. Range	Discharge	: -20~55°C (-4~131°F)
	Charge	: 0~40°C (32~104°F)
	Storage	: -20~50°C (-4~122°F)
Cycle Use	Initial Charging Current less than 750.0A. Voltage	
	2.40V~2.50V at 20°C(68°F)Temp. Coefficient -5mV/°C	
Standby Use	No limit on Initial Charging Current Voltage	
	2.25V~2.30V at 20°C(68°F)Temp. Coefficient -3mV/°C	
Self-discharge	<2% pre month @ 20°C(68°F)	

### Applications

- ◆ Solar energy/wind energy
- ◆ Electric power/nuclear power
- ◆ Communication
- ◆ Ship, maritime affairs
- ◆ UPS, medical facilities and emergency lighting
- ◆ Situation with high environmental protection and energy-saving
- ◆ Better safety performance and reliability
- ◆ Designed service life of 22 years

### Main Technical Advantages

- ◆ Plate: positive plate adopts tubular plate which can prevent active material falling, and adopts multi-component alloy frame. have fine corrosion-resisting performance and long service life. Negative plate adopts special radiated structure.
- ◆ Separator: adopt special micro-pore PVC-SiO<sub>2</sub> separator from Europe AMER-SIL Company, separator have big porosity and low resistance.
- ◆ Electrolyte: adopts Germany gas silicon dioxide, electrolyte in gel state in the battery without flowing, leakage and lamination can be avoided.
- ◆ Safety valve: adopt Germany technology, constant opening and closing, accumulator case expansion, damage and electrolyte dry up can be avoided.

### Constant Current Discharge (Amperes) at 20 °C (68°F)

F.V/Time	10min	15min	30min	1h	2h	3h	5h	8h	10h
1.85V/cell	1751	1708	1562	1332	871	677	467	327	281
1.80V/cell	2154	2068	1820	1500	957	737	504	350	300
1.75V/cell	2548	2314	1940	1561	984	754	513	356	305
1.70V/cell	2859	2526	2054	1621	1009	769	521	361	308
1.65V/cell	3071	2667	2136	1668	1031	783	529	365	311
1.60V/cell	3212	2762	2191	1697	1044	793	535	368	314

### Constant Power Discharge (Watts) at 20 °C (68°F)

F.V/Time	10min	15min	30min	1h	2h	3h	5h	8h	10h
1.85V/cell	3257	3210	2985	2577	1694	1323	918	648	559
1.80V/cell	3936	3831	3444	2883	1852	1433	987	693	596
1.75V/cell	4576	4228	3634	2981	1893	1460	1002	703	604
1.70V/cell	5045	4548	3807	3076	1932	1483	1015	710	610
1.65V/cell	5320	4731	3920	3143	1963	1504	1026	717	615
1.60V/cell	5460	4828	3979	3177	1979	1515	1033	721	619




**Note** The above data are average values, and can be obtained with 3 charge/discharge cycles. These are not minimum values.




## OPzV3000 (2V3000AH) Tubular GEL Battery

### Dimensions

#### T11 Terminal

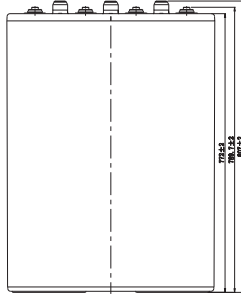


### Discharge Characteristics

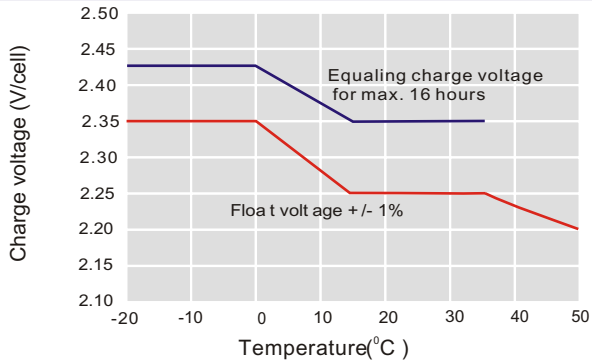


For continuous charging we recommend a voltage of 2.25 V. The charging voltage must be compensated to the curve for continuously different battery ambient temperature.

### Charging Characteristics

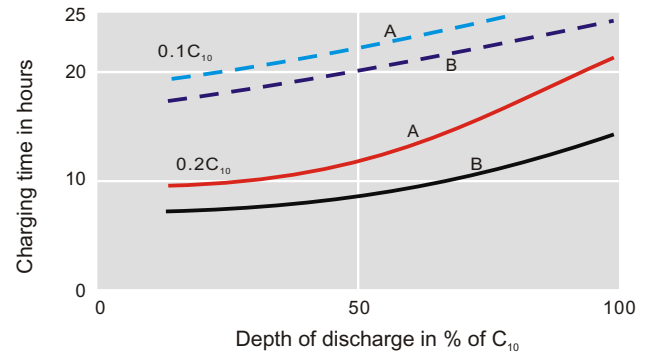


Charge voltage:  
A—2.25 V/cell      B—2.40 V/cell  
-- State of charge 100 %    — State of charge 90 %


### Temperature Effects in Relation to Battery Capacity

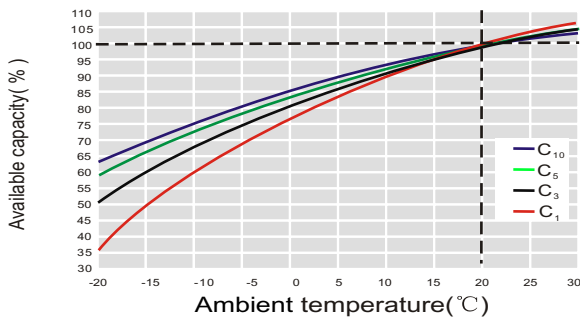


### Effect of Temperature on Long Term Float Life

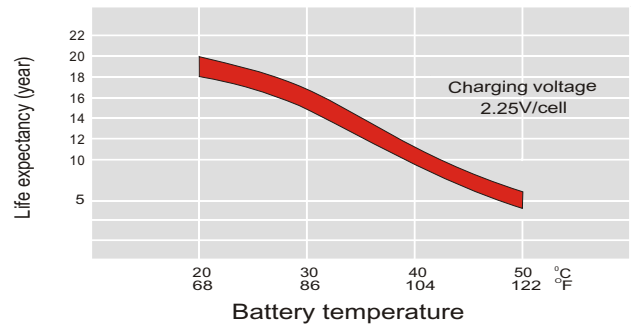

### Cycle Life in Relation to Depth of Discharge

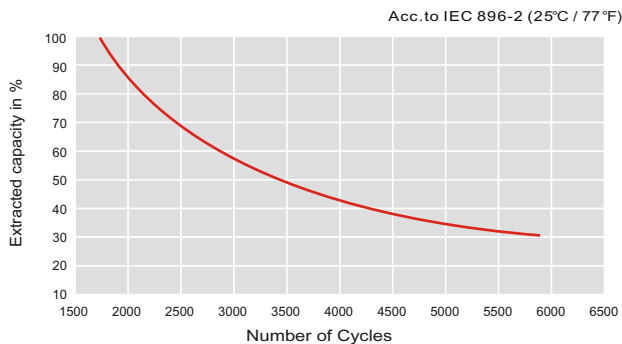

### General Relation of Capacity VS. Storage Time

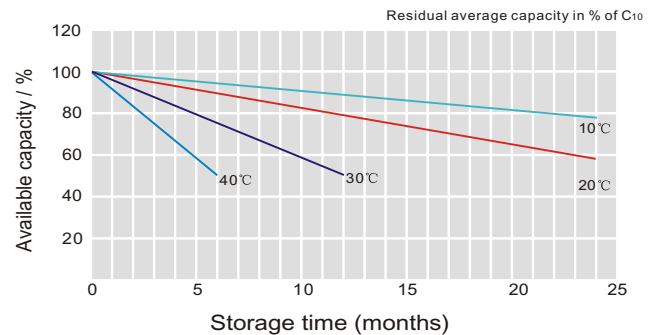

### JYC OPzV BATTERIES

This information is generally descriptive only and is not intended to make or imply any representation, guarantee or warranty with respect to any cells and batteries. Cell and battery designs/ specification are subject to modification without notice. Contact JYC for the latest information.