



LFP50-48 (48V 50Ah)

Lithium Iron Phosphate (LiFePO4) Battery



Features of LiFePO4 Battery

- Longer Cycle Life: Offers up to 20 times longer cycle life and five times longer float/calendar life than lead acid battery, helping to minimize replacement cost and reduce total cost of ownership.
- Lighter Weight: About 40% of the weight of a comparable lead acid battery. A 'drop in' replacement for lead acid batteries.
- Higher Power: Delivers twice power of lead acid battery, even high discharge rate, while maintaining high energy capacity.
- Wider Temperature Range: -20°C~60°C.
- Superior Safety: Lithium Iron Phosphate chemistry eliminates the risk of explosion or combustion due to high impact, overcharging or short circuit situation.
- Increased Flexibility: Modular design enables deployment of up to sixteen batteries in series and up to ten batteries in parallel.

BMS Specification

- Overcharge detection function
- Over discharge detection function
- Over current detection function
- Temperature protection
- Short detection function
- Balance function

Application

- Electric Vehicles,electric mobility
- Solar/wind energy storage system
- UPS,backup power
- Telecommunication
- Medical equipment
- Lighting
- And so on

Specification

Electrical Characteristics	Nominal Voltage	48V
	Nominal Capacity	50Ah
	Energy	2400Wh
	Internal Resistance	≤110mΩ
	Cycle Life	>2000 cycles @1.0C 100%DOD
	Months Self Discharge	<3%
	Efficiency of Charge	100% @0.2C
	Efficiency of Discharge	96~99% @0.5C
Standard Charge	Charge Voltage	54.0±0.2V
	Charge Mode	0.2C to 54.0V, then 54.0V,charge current to 0.02C (CC/CV)
	Charger Current	10A
	Max. Charge Current	50A
	Charge Cut-off Voltage	57.6V±0.2V
Standard Discharge	Continuous Current	10A
	Max continuous discharge current	50A
	Discharge Cut-off Voltage	37.5V
Environmental	Charge Temperature	0 °C to 45 °C (32°F to 113°F) @60±25% Relative Humidity
	Discharge Temperature	-20 °C to 60 °C (-4°F to 140°F) @60±25% Relative Humidity
	Storage Temperature	0 °C to 40 °C (32°F to 104°F) @60±25% Relative Humidity
	Water Dust Resistance	IP30
Mechanical	Cell & Method	3.2V50AH 15S1P
	Plastic Case	iron(SPCC)
	Dimensions (in./mm.)	442*385*132mm(17.4"*15.16"*5.20")
	Weight (lbs./kg.)	Approx: 30kg (66.14 lbs)
	Gravimetric specific energy	80WH/KG
	Protocol (optional)	ModBus/RS485/RS232
SOC (optional)	LED	




LFP50-48 (48V 50Ah)

Lithium Iron Phosphate (LiFePO4) Battery


Different Rate Discharge Curve

Different Rate Discharge Curve @25°C

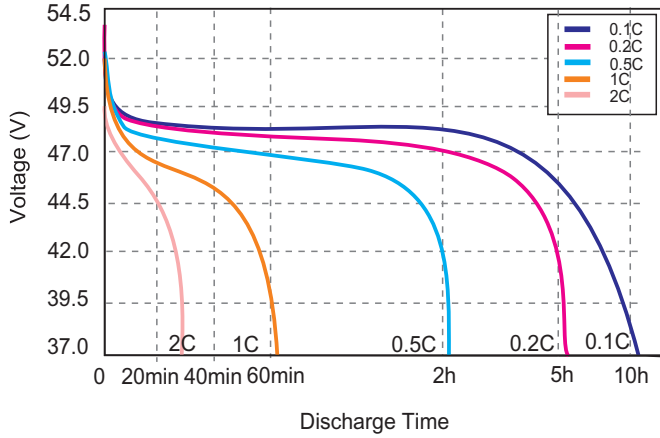


Different Temperature Discharge Curve

Different Temperature Discharge Curve @0.5C

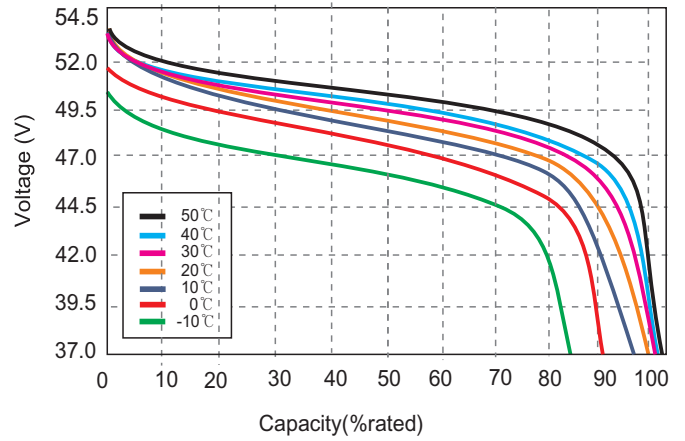


State of Charge Curve

State of Charge Curve @0.5C 25°C

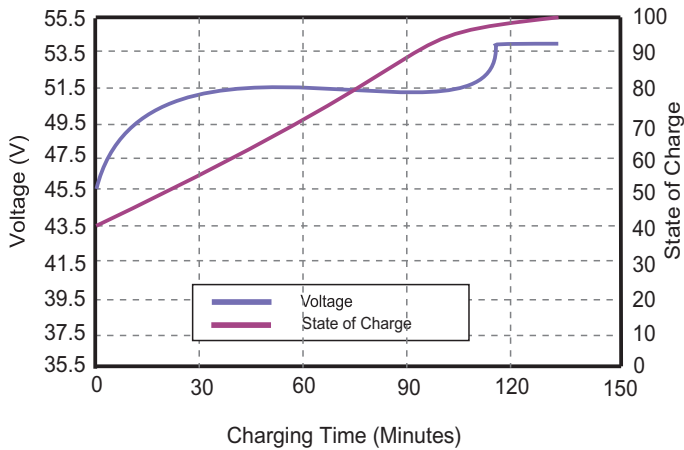


Charging Characteristics

Charging Characteristics @0.5C 25°C

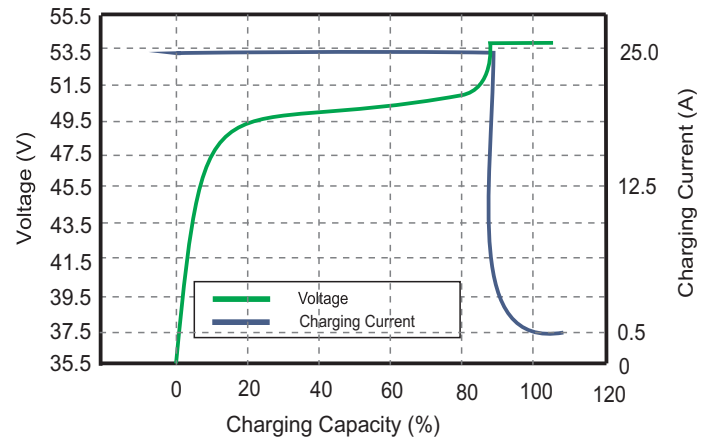


Cycle Life Curve

Different DOD Discharge Cycle Life Curve @0.2C

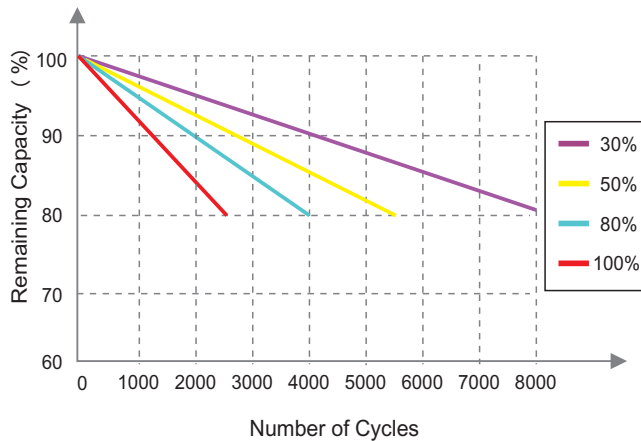

Self Discharge Characteristics Curve

Different Temperature Self Discharge Curve

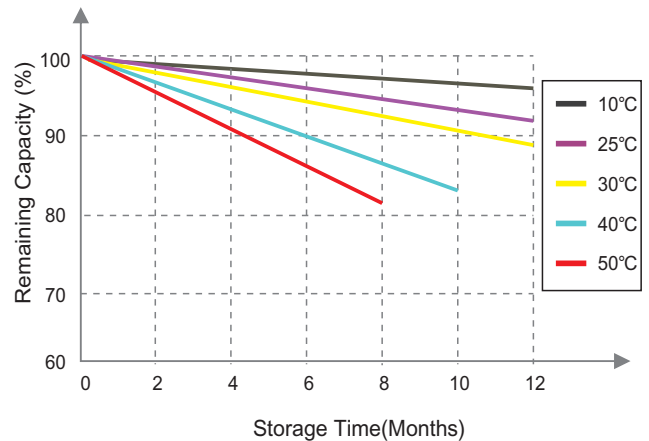

JYC LFP BATTERIES

This information is generally descriptive only and is not intended to make or imply any representation, guarantee or warranty with respect to any cells and batteries. Cell and battery designs/ specification are subject to modification without notice. Contact JYC for the latest information.