

GEL 12-120 12V 120AH

SOLAR POWER AND WIND POWER STORAGE GEL BATTERY



Specification

Nominal Voltage	12V	
Nominal Capacity(10HR)	120AH	
Dimension	Length	407 ± 3mm (16.0 inches)
	Width	173 ± 2mm (6.81 inches)
	Container Height	208 ± 2mm (8.18 inches)
	Total Height (with Terminal)	233 ± 2mm (9.17 inches)
Approx Weight	Approx 32.0 kg (70.55 lbs)	
Terminal	T11	
Container Material	ABS	
Rated Capacity	124.8 AH/6.24A	(20hr ,1.80V/cell,25°C/77°F)
	120.0 AH/12.0A	(10hr, 1.80V/cell,25°C/77°F)
	103.2 AH/20.64A	(5hr, 1.75V/cell,25°C/77°F)
	93.6 AH/31.2A	(3hr, 1.75V/cell,25°C/77°F)
	73.2 AH/73.2A	(1hr, 1.60V/cell,25°C/77°F)
Max. Discharge Current	1300A (5s)	
Internal Resistance	Approx 4.0 mΩ	
Operating Temp.Range	Discharge	-15 ~50°C (5 ~122°F)
	Charge	0 ~40°C (32~104°F)
	Storage	-15 ~40°C (5 ~104°F)
Nominal Operating Temp.Range	25 ± 3°C (77± 5°F)	
Cycle Use	Initial Charging Current less than 36.0A.Voltage	
	14.4V~15.0V at 25°C(77°F)Temp. Coefficient -30mV/°C	
Standby Use	No limit on Initial Charging Current Voltage	
	13.5V~13.8V at 25°C(77°F)Temp. Coefficient -20mV/°C	
Capacity affected by	40°C (104 °F)	103%
	25°C (77 °F)	100%
	0°C (32 °F)	86%
Temperature		
Self Discharge	Techfine batteries may be stored for up to 6 months	
	at 25°C(77°F) and battery should be recharge before use .	
	For higher temperatures the time interval will be shorter.	

Applications

- ◆ All purpose
- ◆ Uninterruptable Power Supply (UPS)
- ◆ Electric Power System (EPS)
- ◆ Emergency backup power supply
- ◆ Emergency light
- ◆ Railway signal
- ◆ Aircraft signal
- ◆ Alarm and security system
- ◆ Electronic apparatus and equipment
- ◆ Communication power supply
- ◆ DC power supply
- ◆ Auto controlsystem

ISO 9001	ISO 14001	OHSAS 18001	
	RoHS		

Constant Current Discharge (Amperes) at 25 °C (77°F)

F.V/Time	5min	10min	15min	20min	30min	45min	1h	2h	3h	4h	5h	6h	8h	10h	20h
1.85V/cell	205.4	161.5	137.3	114.9	91.3	69.1	56.6	36.0	28.5	23.3	18.8	16.3	13.3	11.3	6.18
1.80V/cell	275.7	206.3	165.9	135.8	107.7	80.4	63.4	39.3	30.7	24.8	20.1	17.5	14.1	12.0	6.24
1.75V/cell	310.8	226.7	181.2	146.1	111.8	83.4	66.3	40.8	31.2	25.4	20.6	18.0	14.3	12.1	6.30
1.70V/cell	342.3	247.1	193.5	153.5	116.4	86.7	68.4	42.4	32.1	26.1	21.2	18.4	14.5	12.2	6.42
1.65V/cell	377.4	266.7	205.7	163.1	122.8	88.9	70.7	43.6	33.5	27.0	21.8	18.8	14.7	12.5	6.50
1.60V/cell	416.3	289.5	220.0	173.7	129.6	92.6	73.2	45.1	34.5	27.8	22.5	19.2	14.9	12.6	6.54

Constant Power Discharge (Watts) at 25 °C (77°F)


F.V/Time	5min	10min	15min	20min	30min	45min	1h	2h	3h	4h	5h	6h	8h	10h	20h
1.85V/cell	375.5	298.3	256.2	216.5	174.0	132.8	109.1	70.0	55.5	45.5	36.8	32.1	26.2	22.4	12.2
1.80V/cell	498.7	376.6	305.4	252.2	202.2	153.2	121.6	75.9	59.4	48.3	39.3	34.3	27.7	23.7	12.3
1.75V/cell	550.3	407.2	329.5	268.7	208.1	157.5	126.6	78.4	60.3	49.2	40.2	35.1	28.1	23.9	12.4
1.70V/cell	589.2	433.8	346.9	280.2	215.4	163.2	130.2	81.3	61.9	50.4	41.1	35.8	28.5	24.1	12.7
1.65V/cell	640.5	463.8	366.0	295.5	225.4	165.8	133.6	83.1	64.2	52.0	42.1	36.5	28.8	24.6	12.8
1.60V/cell	690.1	492.1	385.0	311.3	236.3	171.8	137.6	85.5	65.9	53.4	43.4	37.2	29.1	24.8	12.9

Note The above data are average values, and can be obtained with 3 charge/discharge cycles. These are not minimum values.


Dimensions

T11 Terminal


Unit: mm [inches]

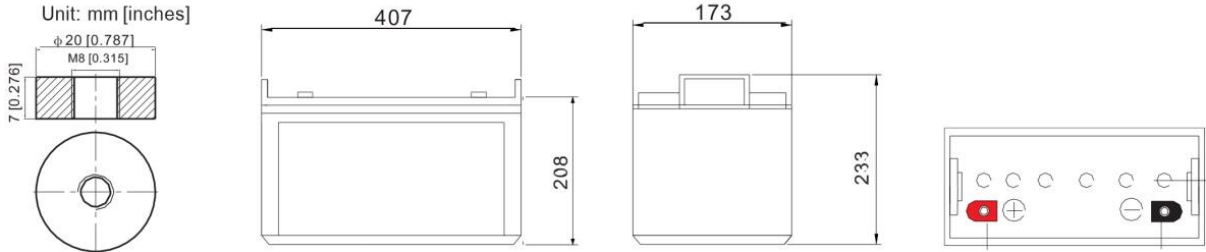


Discharge Characteristics

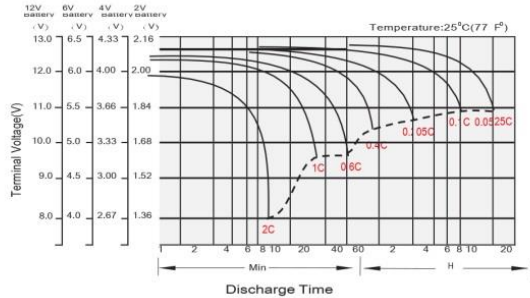


Float Charging Characteristics

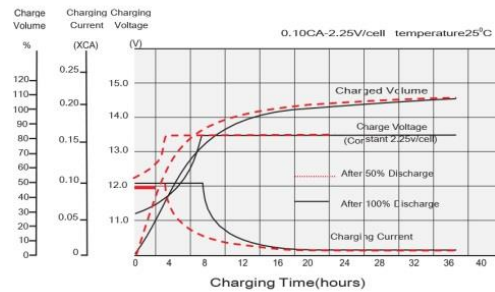


Temperature Effects in Relation to Battery Capacity

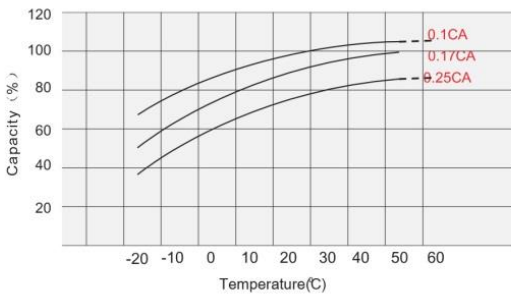


Effect of Temperature on Long Term Float Life

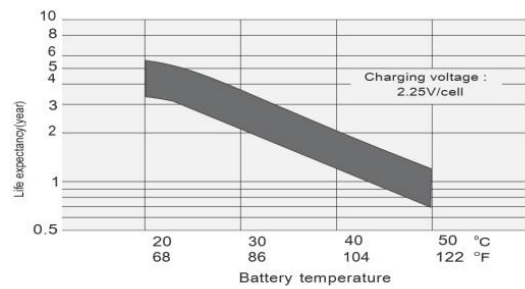

Cycle Life in Relation to Depth of Discharge

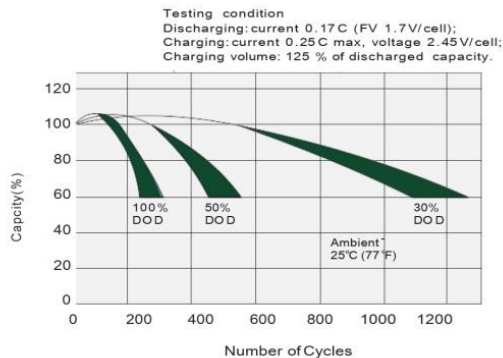

Self Discharge Characteristics

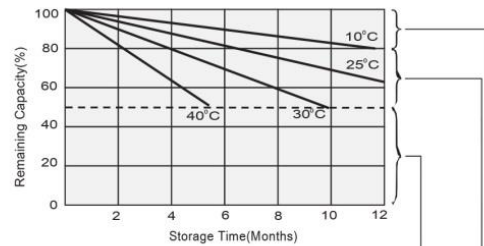

Supplementary charge may often fail to recover the capacity.
The battery should never be left standing till this is reached.

Supplementary charge required before use. Optional charging way as below:
1. Charged for above 3 days at limited current 0.25CA and constant voltage 2.25V/cell.
2. Charged for above 20 hours at limited current 0.25CA and constant voltage 2.45V/cell.
3. Charged for 8-10 hours at limited current 0.05CA.

No supplementary charge required
(Carry out supplementary charge before use if 100% capacity is required.)