

IN-20C-25C



- Time control
- +Light control
- +Human body infrared sensor
- +Mobile APP Intelligent Control



All in One Solar Street Light INTF-Series

Features:

1. Aluminium alloy Germany solarworld mono solar panel USA bridgelux 45mil LED powerful Li-battery with MPPT smart controller;
2. Possess Time control, Light control, Human body infrared sensor, Mobile APP Intelligent Control;
3. Could be mounted on pole and wall
3. Working temperature: -30 ~+60
4. Application area: scenic spot, park, outdoor parking, rural roads, provincial roads state road, etc.

Parameter Specification:

Power	20W	25W
Product size	960*340*45MM	960*340*45MM
Solar Panel	18V 50W	18V 50W
LED Brand	20W USA bridgelux 45mil	25W USA bridgelux 45mil
Color Temperature	6000-6500K	6000-6500K
Lumen	2100-2200LM	2500-2700LM
Battery	lithium battery 18AH	lithium battery 20AH
Discharge Time	>36 Hour	>36 Hour
Temperature	-30 ~+60	-30 ~+60
Waterproof Rate	IP65	IP65
Mounting Height	4-6M	4-6M
N.W/G.W	11KG/13KG	11KG/13KG
Qty	1pc/carton	1pc/carton
Packing Dimensions	1070*400*200MM	1070*400*200MM
Container	300 sets/20'GP	300 sets/20'GP

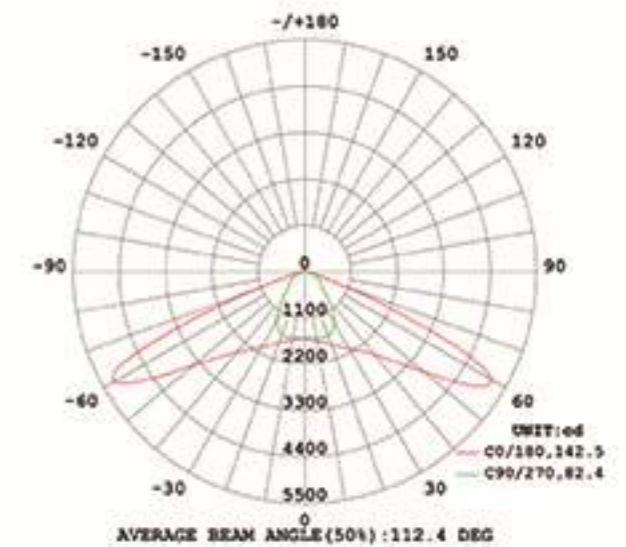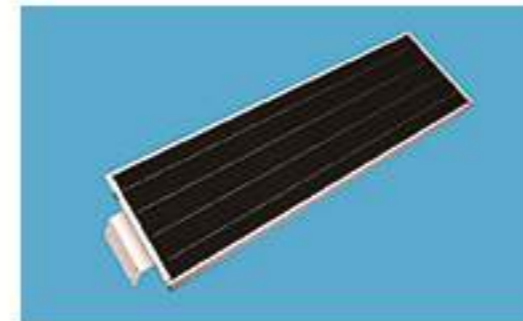

IN-30C-60C



- Time control
- +Light control
- +Human body infrared sensor
- +Mobile APP Intelligent Control

All in One Solar Street Light INTF-Series

Features:

1. Aluminium alloy Germany solarworld mono solar panel/USA sunpower high efficiency mono solar panel USA bridgelux 45mil LEDypowerful Li-battery with MPPT smart controller;
2. Possess Time control ,Light control,Human body infrared sensor,Mobile APP Intelligent Control;
3. Could be mounted on pole and wall
3. Working temperature: -30 ~+60
4. Application area: scenic spot, park, outdoor parking, rural roads, provincial roads state road, etc.

Parameter Specification:

Power	30W	40W	50W	60W
Product size	1210*340*45MM	1210*340*45MM	1210*340*45MM	1210*340*45MM
Solar Panel	18V 65W (Solarworld)	18V 65W (Solarworld)	18V 70W(sunpower)	18V 70W(sunpower)
LED Brand	30W USA bridgelux 45mil	40W USA bridgelux 45mil	50W USA bridgelux 45mil	60W USA bridgelux 45mil
Color Temperature	6000-6500K	6000-6500K	6000-6500K	6000-6500K
Lumen	3000-3600LM	4000-4600LM	5000-6000LM	6500-7000LM
Battery	lithium battery 26AH	lithium battery 30AH	lithium battery 35AH	lithium battery 36AH
Discharge Time	> 36 Hour	> 36 Hour	> 36 Hour	> 36 Hour
Temperature	-30 —+60	-30 —+60	-30 —+60	-30 —+60
Waterproof Rate	IP65	IP65	IP65	IP65
Mounting Height	6-8M	6-8M	7-9M	7-9M
N.W/G.W	17KG/18KG	17KG/18KG	18KG/19KG	18KG/19KG
Qty	1pc/carton	1pc/carton	1pc/carton	1pc/carton
Packing Dimensions	1340*400*200MM	1340*400*200MM	1340*400*200MM	1340*400*200MM
Container	250 sets/20'GP	250 sets/20'GP	250 sets/20'GP	250 sets/20'GP

