



T01F

Lampu Jalan LED Modular Bright LED


- Menggunakan Chip Luxeon dari PHILIPS Lumileds yang terbukti handal dan berkualitas serta memiliki luminasi yang tinggi
- Housing Full Metal Aluminium Die Cast yang terintegrasi dengan sirip pendingin yg berfungsi sebagai disipasi panas untuk memperpanjang umur chip LED
- IP68 index proteksi tertinggi untuk aplikasi outdoor
- Distribusi cahaya yang ergonomis untuk mencapai hasil pencahayaan optimal yang seragam
- Teknologi Flip-Chip, jika salah satu chip rusak maka yang lain tetap bisa menyala dengan normal
- Beragam Pilihan Distribusi Cahaya sesuai kebutuhan
- Harga kompetitif dengan garansi produk yang terjamin




▲ Spesifikasi

Model	Input Voltage (v)	Drive Current (mA)	Power (w)	Luminous Efficacy (lm/w)	Lumens (lm)	Power Factor	Power Efficiency	Light Distributions
T01F-30	AC100-240 or DC 12/24V	700	30	110 ± 5	3300±150	0.95	88%	Type I
T01F-40		700	40	110 ± 5	4400±200			
T01F-50		860	50	105± 5	5250±250			
T01F-60		1050	60	100 ± 5	6000±300			

▲ Distribusi Cahaya

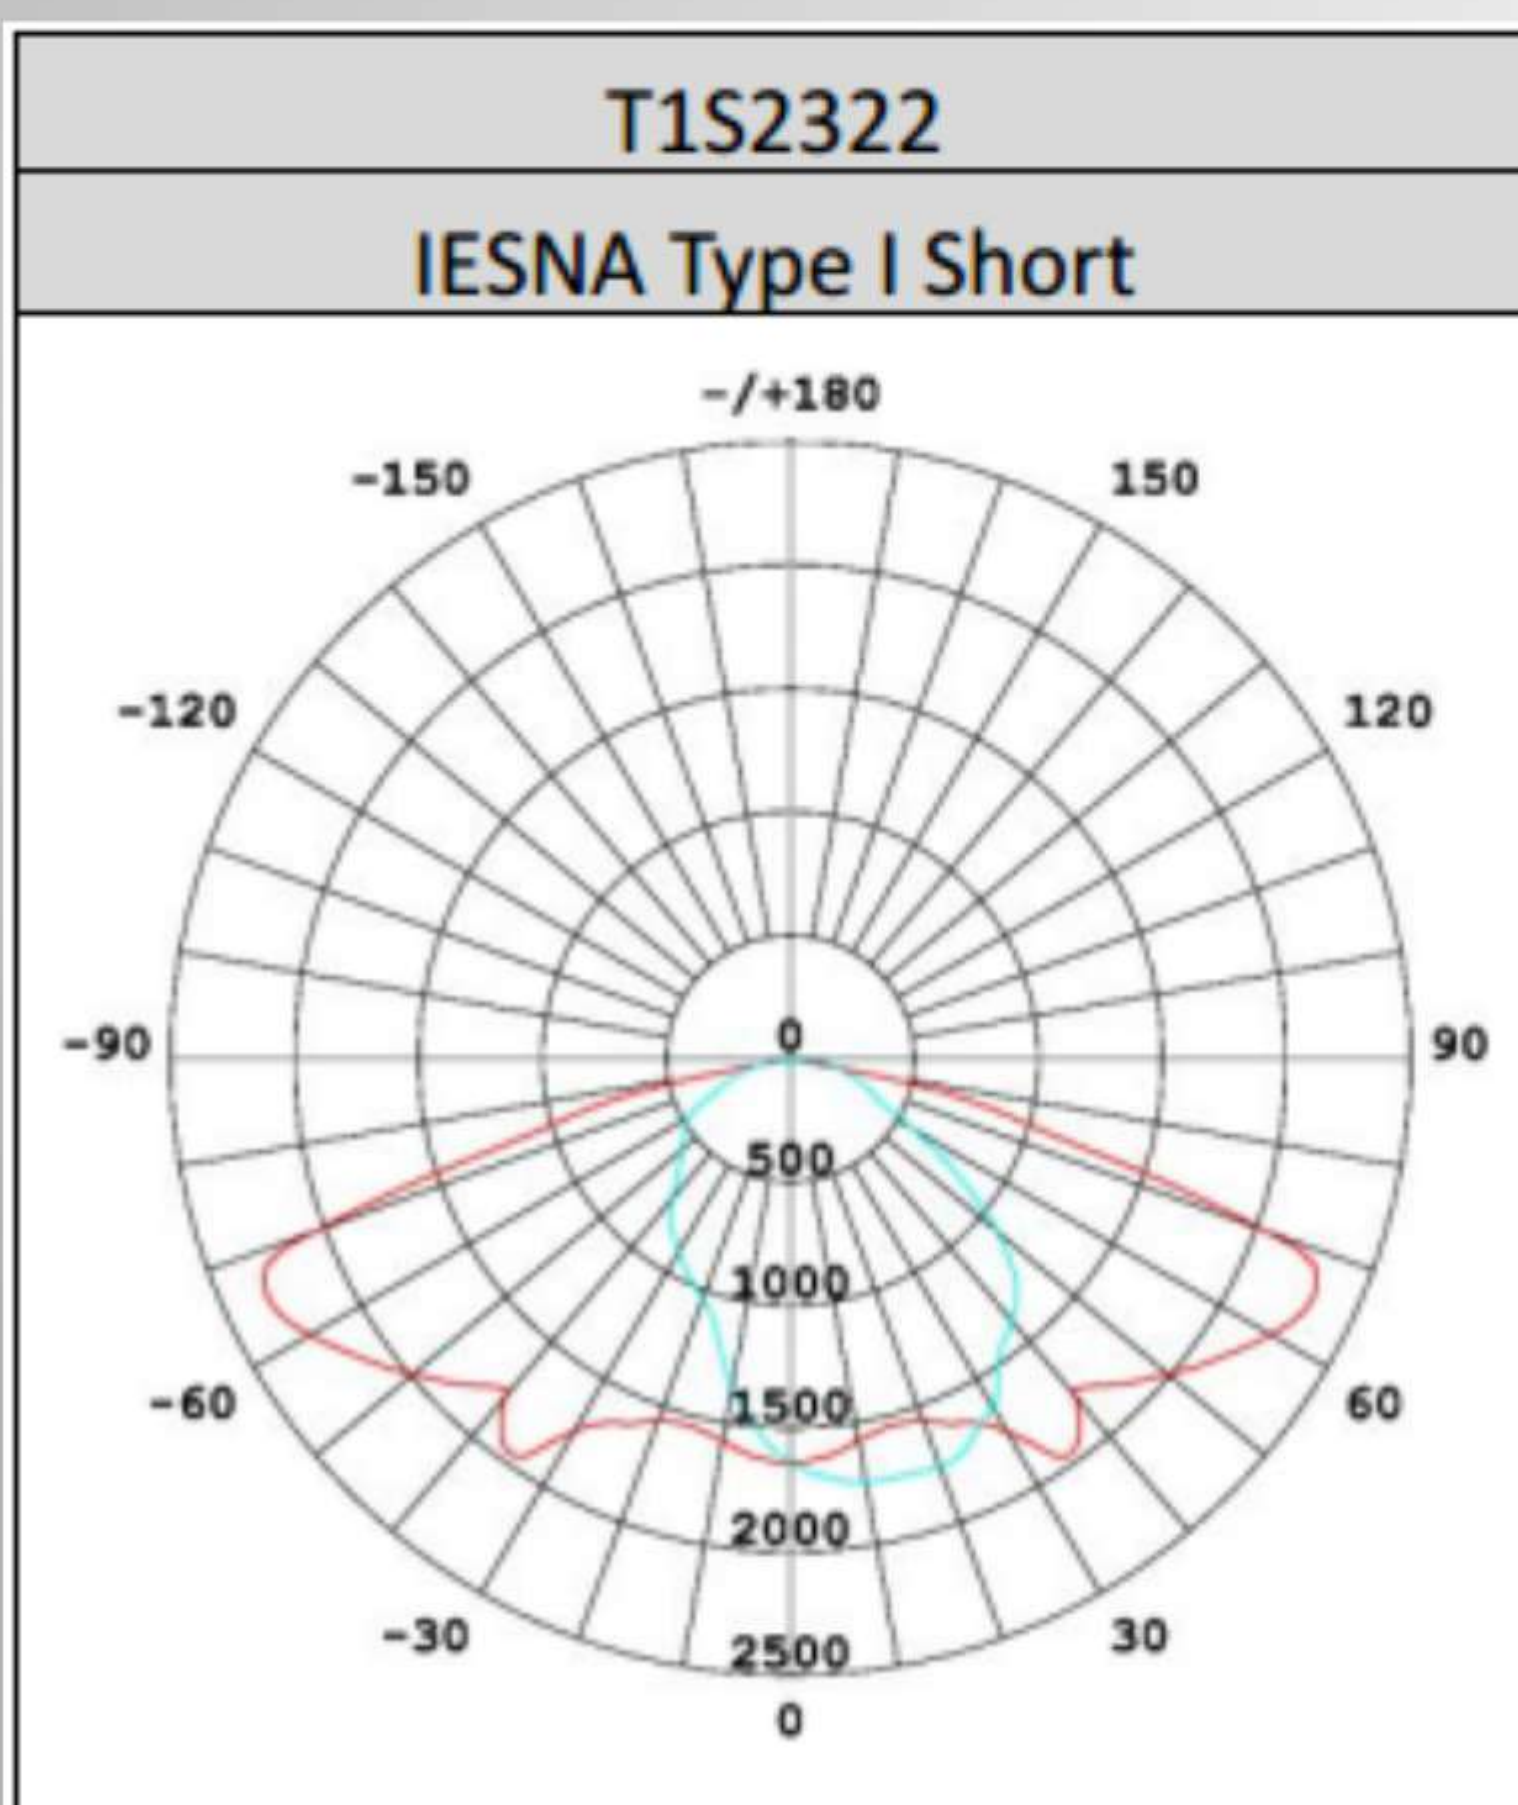

▲ Dimensi

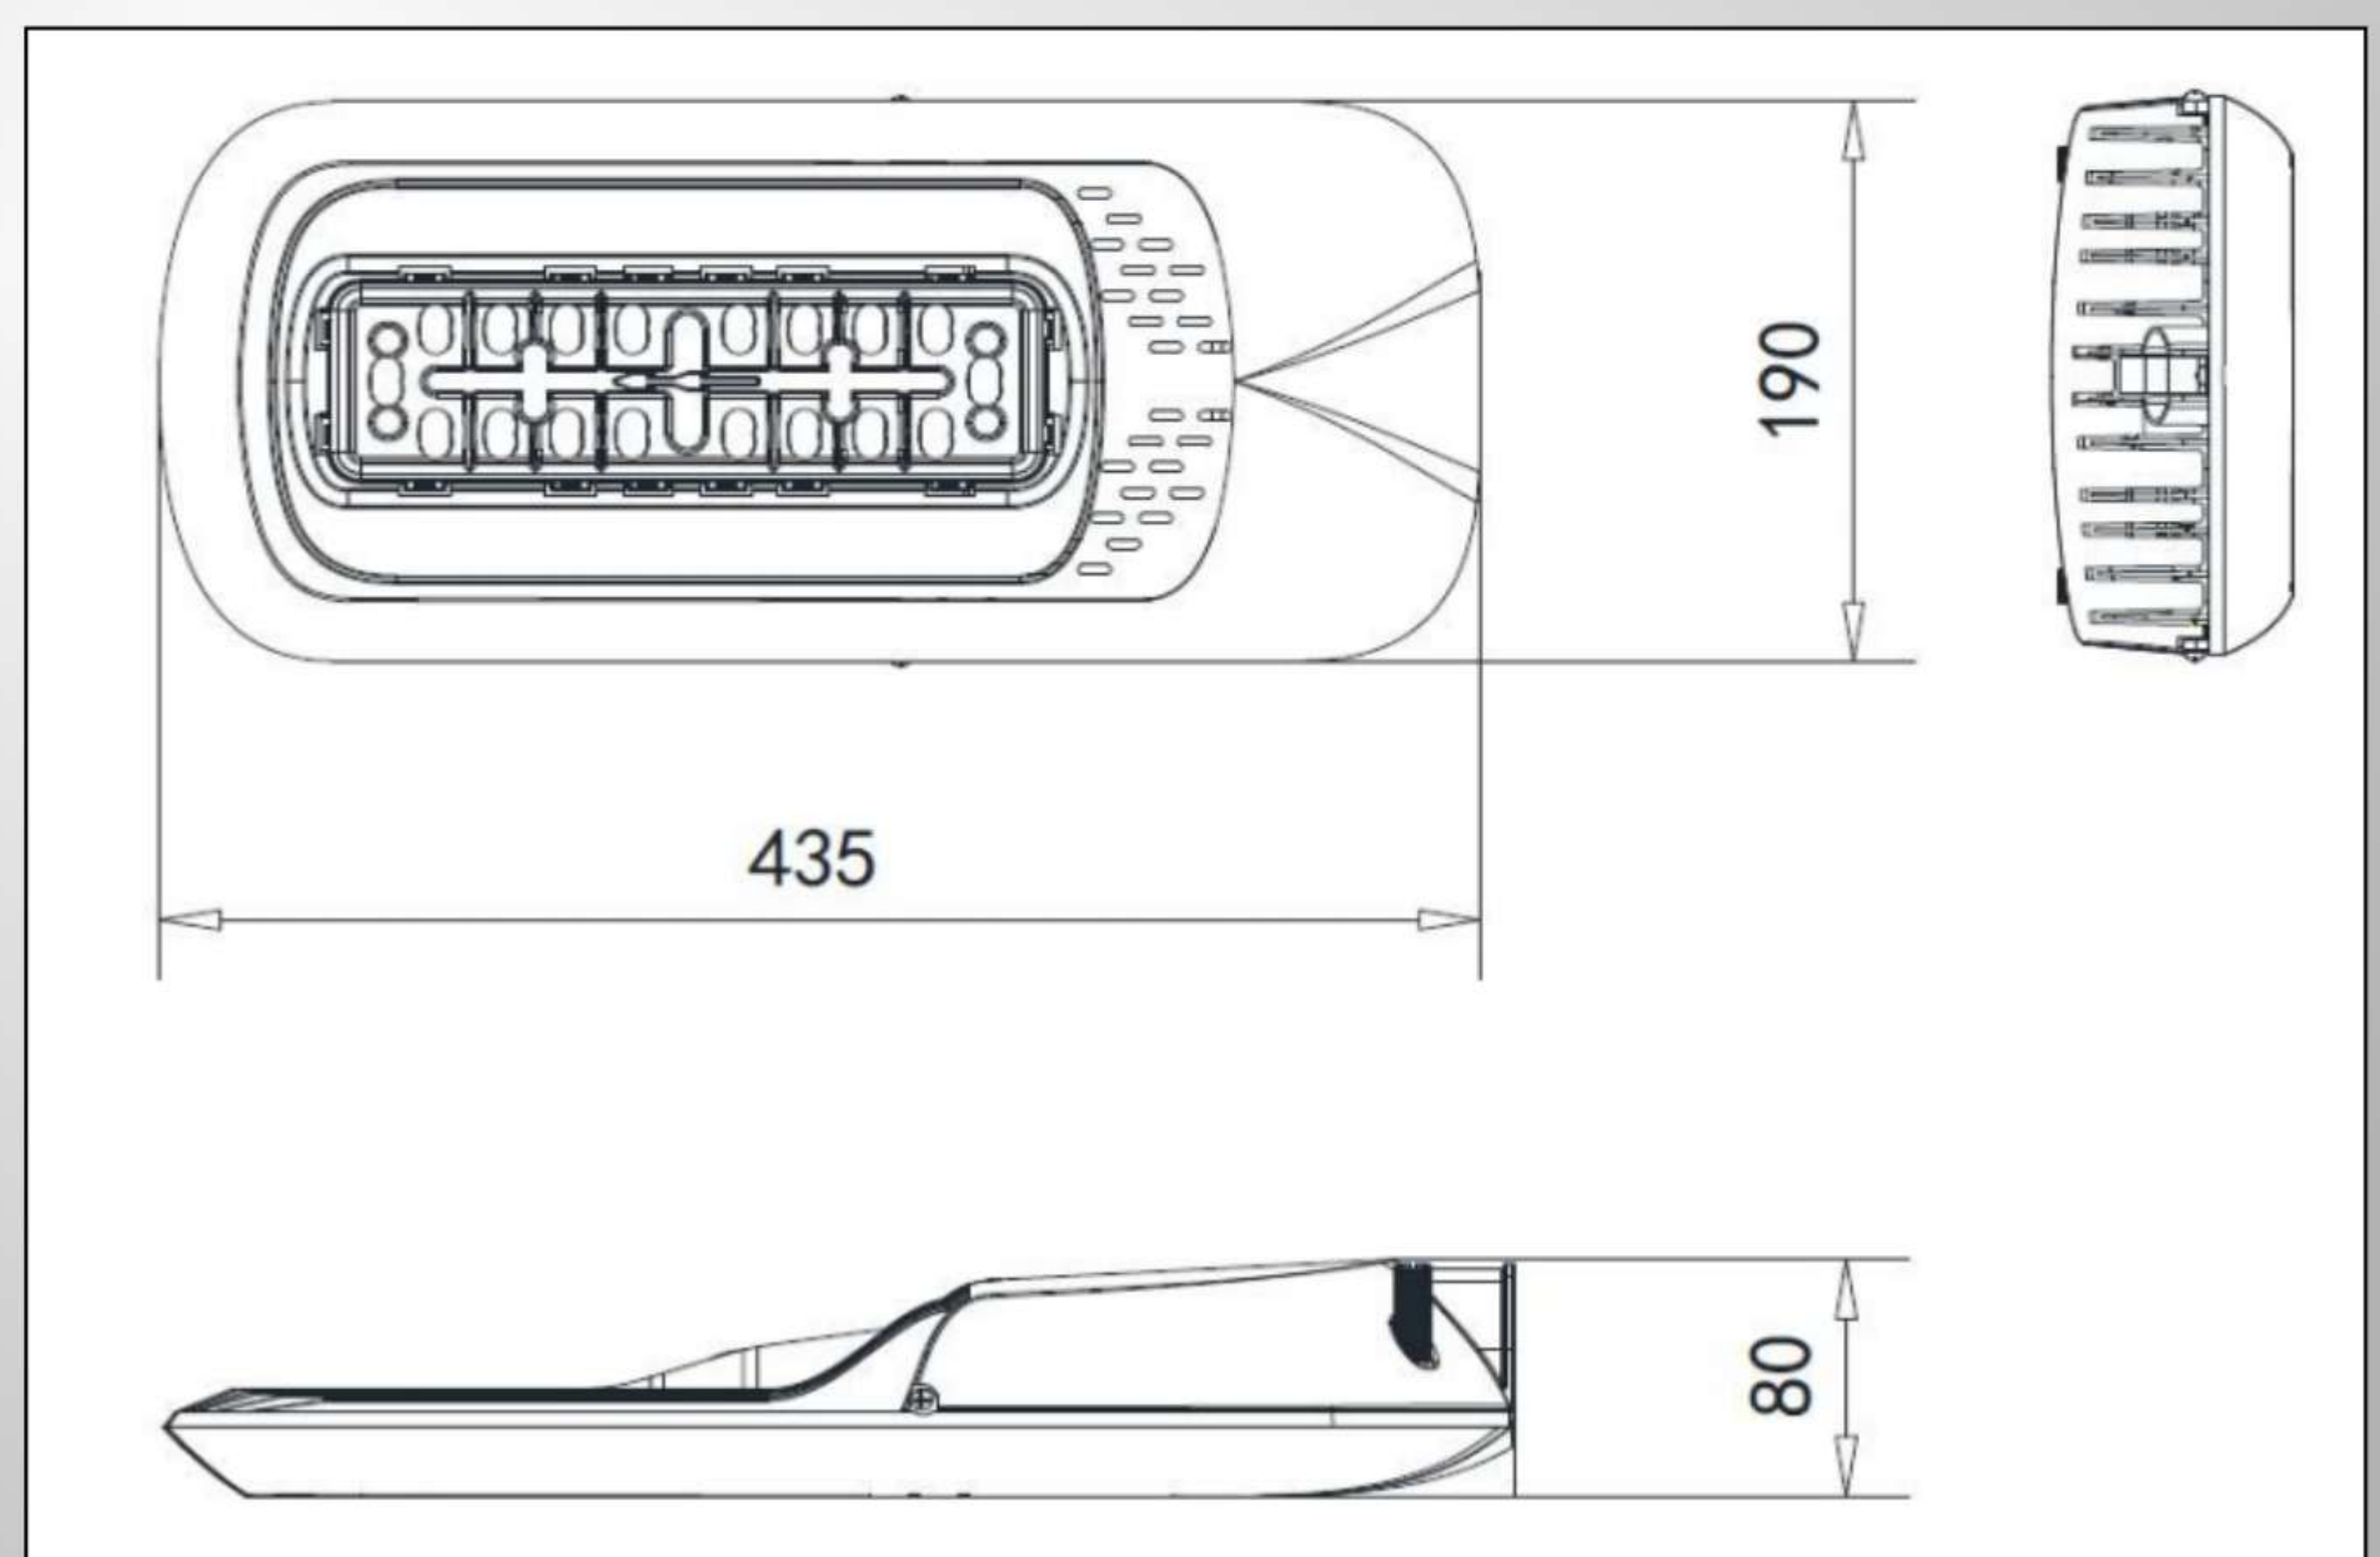

Lamp Pole Hole


Lamp pole to be prepared by user,
suitable for 57-63mm

Driver Cover



Water Hole


Die-Casting Aluminum Housing

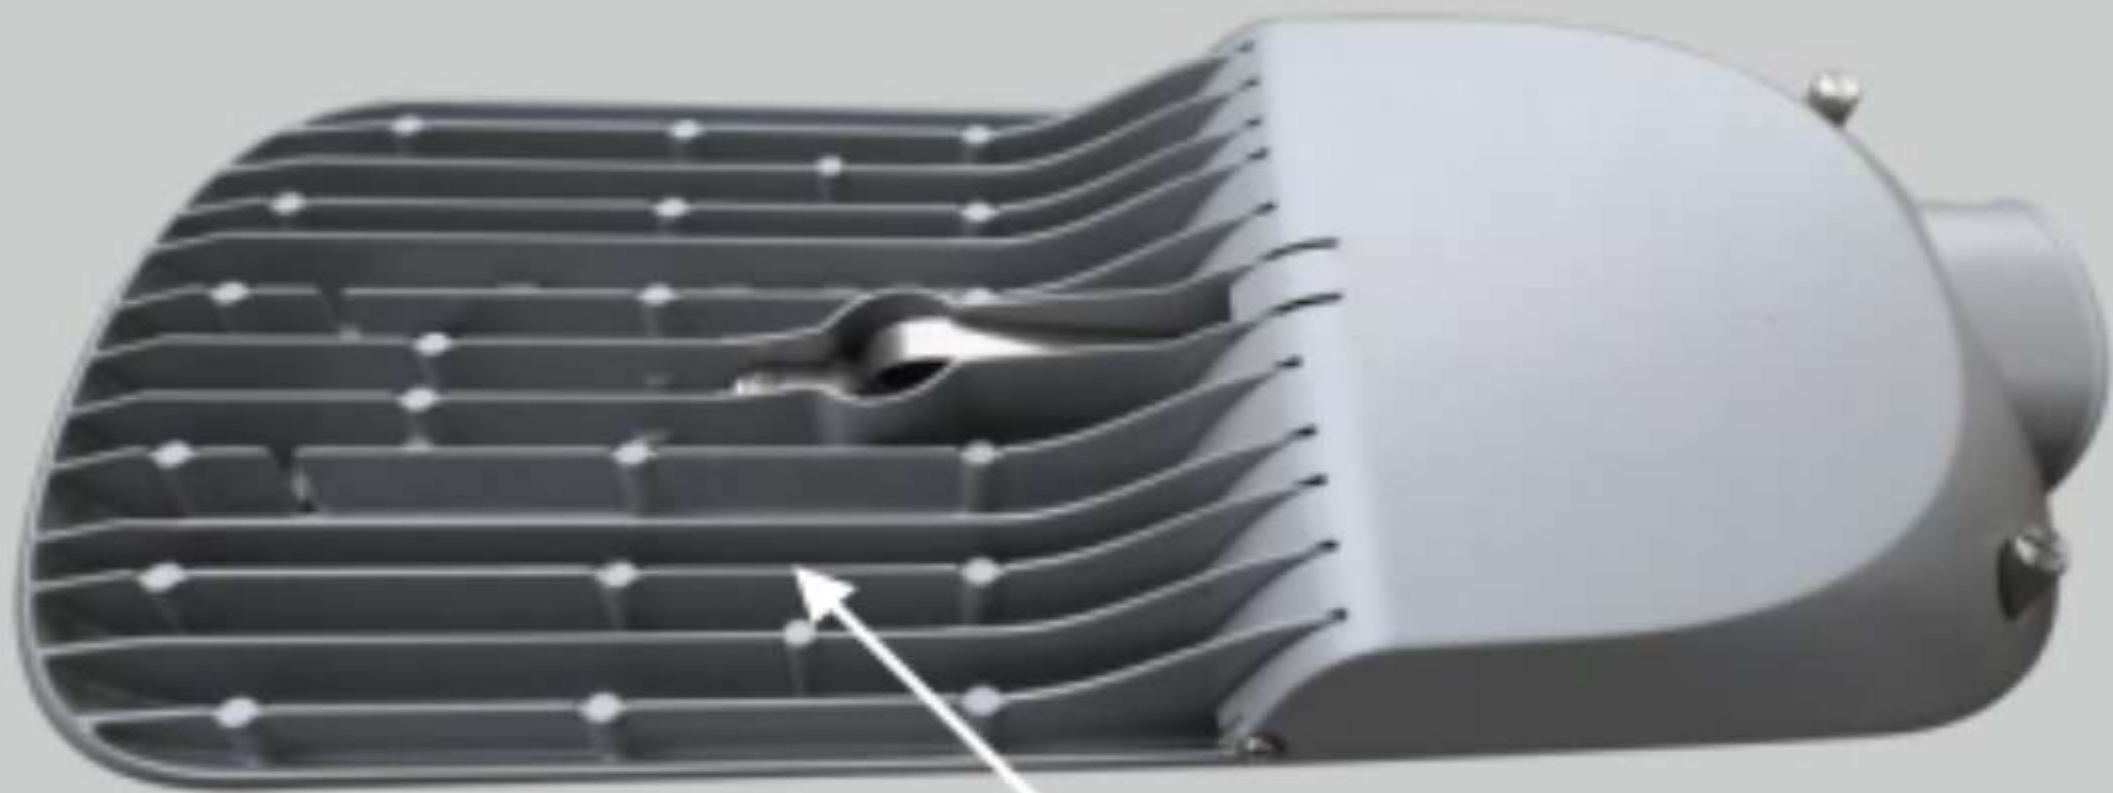

Integration of lamp Housing Heat Dissipation



IP68 Optical Engine

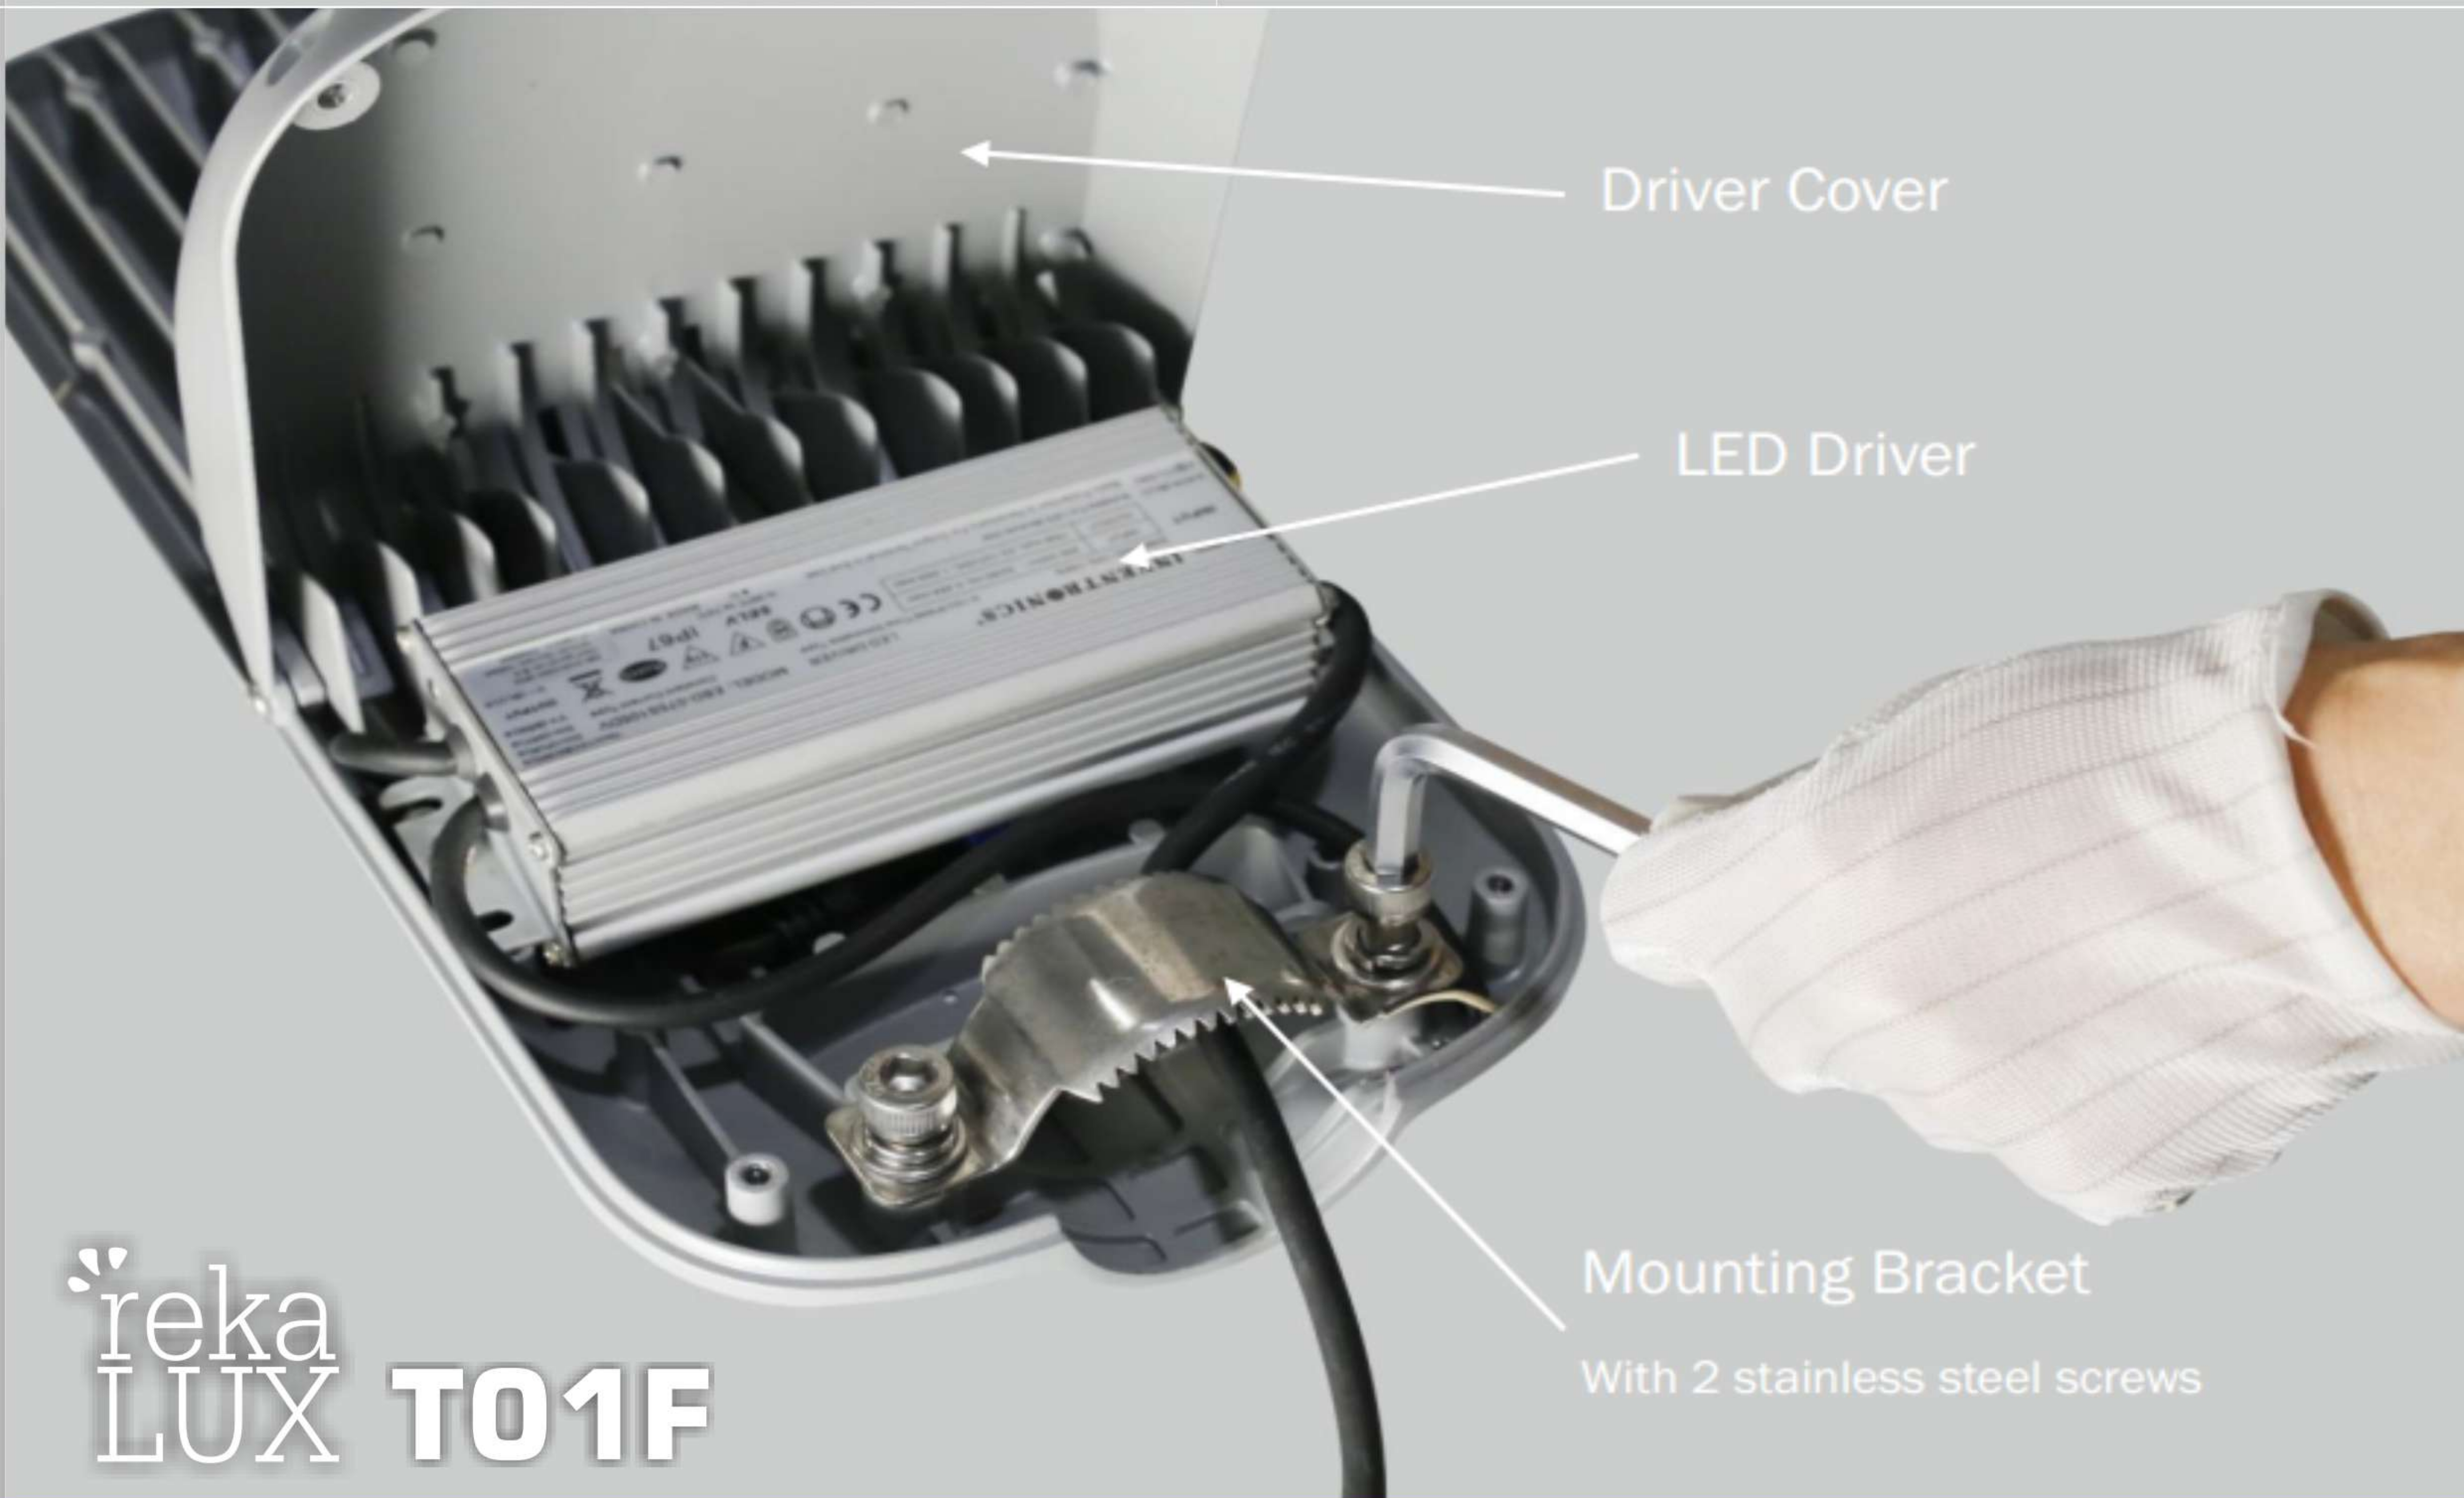

Driver Cover

LED Driver

Mounting Bracket

With 2 stainless steel screws

reka
LUX T01F