

# TF12-80 12V 80AH

## VALVE REGULATED LEAD ACID BATTERY



### Specification

Nominal Voltage	12V	
Nominal Capacity(10HR)	80AH	
Dimension	Length	330 ±3mm (12.99 inches)
	Width	173 ±2mm (6.81 inches)
	Container Height	214 ±2mm (8.43 inches)
	Total Height (with Terminal)	243±2mm (9.57 inches)
Approx Weight	Approx 21kg (46.2 lbs)	
Terminal	T9	
Container Material	ABS	
Rated Capacity	80AH/3.90A	(20hr ,1.80V/cell,25°C/77°F)
	70.0AH/7.00A	(10hr,1.80V/cell,25°C/77°F)
	63.7 AH/12.7A	(5hr,1.75V/cell,25°C/77°F)
	50.7 AH/16.9A	(3hr,1.75V/cell,25°C/77°F)
	41.2 AH/41.2A	(1hr,1.60V/cell,25°C/77°F)
Max. Discharge Current	840A (5s)	
Internal Resistance	Approx 8mΩ	
Operating Temp.Range	Discharge	: -15 ~50°C (5 ~122°F)
	Charge	: 0 ~40°C (32 ~104°F)
	Storage	: -15 ~40°C (5 ~104°F)
Nominal Operating Temp. Range	25 ±3°C (77 ±5°F)	
Cycle Use	Initial Charging Current less than 19.5 A.Voltage	
	14.4V~15.0V at 25°C(77°F)Temp. Coefficient -30mV/°C	
Standby Use	No limit on Initial Charging Current Voltage	
	13.5V~13.8V at 25°C(77°F)Temp. Coefficient -20mV/°C	
Capacity affected by Temperature	40°C (104 °F)	103%
	25°C (77 °F)	100%
	0°C (32 °F)	86%
Self Discharge	Techfine batteries may be stored for up to 6 months at 25°C(77°F) and battery should be recharge before use . For higher temperatures the time interval will be shorter.	

### Applications

- ◆ All purpose
- ◆ Uninterruptable Power Supply (UPS)
- ◆ Electric Power System (EPS)
- ◆ Emergency backup power supply
- ◆ Emergency light
- ◆ Railway signal
- ◆ Aircraft signal
- ◆ Alarm and security system
- ◆ Electronic apparatus and equipment
- ◆ Communication power supply
- ◆ DC power supply
- ◆ Auto controlsystem

ISO 9001	ISO 14001	OHSAS 18001	TLC
CE	RoHS	CCC	UL

### Constant Current Discharge (Amperes) at 25 °C (77°F)

F.V/Time	5min	10min	15min	20min	30min	45min	1h	2h	3h	4h	5h	6h	8h	10h	20h
1.85V/cell	111.2	87.5	74.4	62.2	49.4	37.4	30.6	19.5	15.4	12.6	10.2	8.85	7.18	6.14	3.35
1.80V/cell	149.3	111.8	89.9	73.5	58.3	43.5	34.3	21.3	16.6	13.5	10.9	9.49	7.62	6.50	3.38
1.75V/cell	168.4	122.8	98.2	79.1	60.6	45.2	35.9	22.1	16.9	13.8	11.2	9.75	7.75	6.57	3.41
1.70V/cell	185.4	133.8	104.8	83.1	63.0	47.0	37.0	23.0	17.4	14.1	11.5	9.95	7.86	6.63	3.48
1.65V/cell	204.5	144.4	111.4	88.3	66.5	48.1	38.3	23.6	18.1	14.6	11.8	10.2	7.98	6.77	3.52
1.60V/cell	225.5	156.8	119.2	94.1	70.2	50.2	39.7	24.4	18.7	15.1	12.2	10.4	8.06	6.84	3.54

### Constant Power Discharge (Watts) at 25 °C (77°F)

F.V/Time	5min	10min	15min	20min	30min	45min	1h	2h	3h	4h	5h	6h	8h	10h	20h
1.85V/cell	203.4	161.6	138.8	117.3	94.2	71.9	59.1	37.9	30.1	24.6	19.9	17.4	14.2	12.1	6.63
1.80V/cell	270.1	204.0	165.4	136.6	109.5	83.0	65.9	41.1	32.2	26.2	21.3	18.6	15.0	12.8	6.69
1.75V/cell	298.1	220.6	178.5	145.5	112.7	85.3	68.6	42.5	32.7	26.7	21.8	19.0	15.2	13.0	6.74
1.70V/cell	319.1	235.0	187.9	151.8	116.7	88.4	70.5	44.1	33.5	27.3	22.3	19.4	15.4	13.1	6.87
1.65V/cell	346.9	251.2	198.3	160.1	122.1	89.8	72.4	45.0	34.8	28.2	22.8	19.8	15.6	13.3	6.95
1.60V/cell	373.8	266.5	208.5	168.6	128.0	93.1	74.5	46.3	35.7	28.9	23.5	20.1	15.7	13.4	6.98

**Note** The above data are average values, and can be obtained with 3 charge/discharge cycles. These are not minimum values.



# TF12-80 12V 80AH

## VALVE REGULATED LEAD ACID BATTERY


### Dimensions

#### T11 Terminal


Unit: mm [inches]

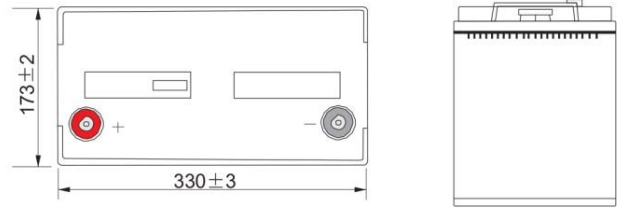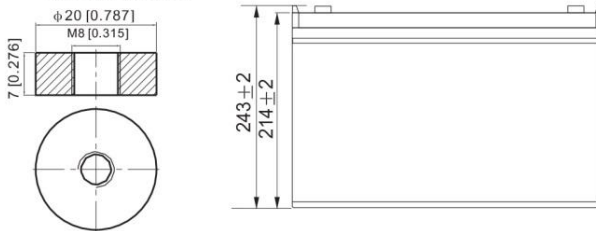


### Discharge Characteristics

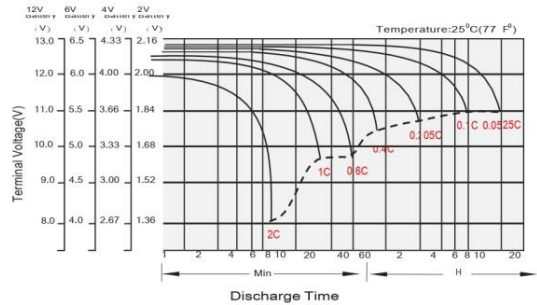


### Float Charging Characteristics

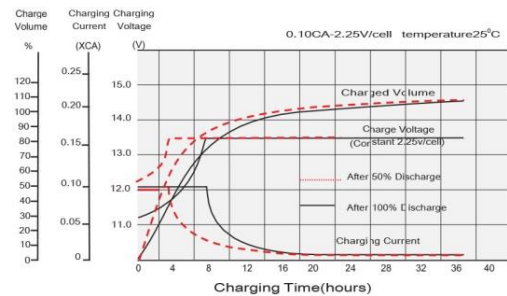


### Temperature Effects in Relation to Battery Capacity

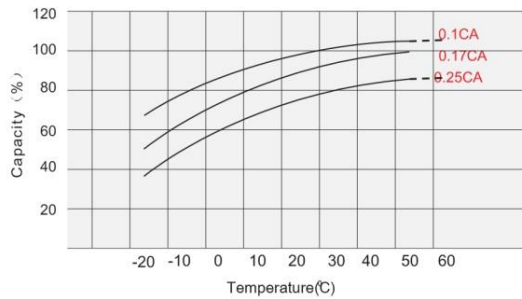


### Effect of Temperature on Long Term Float Life

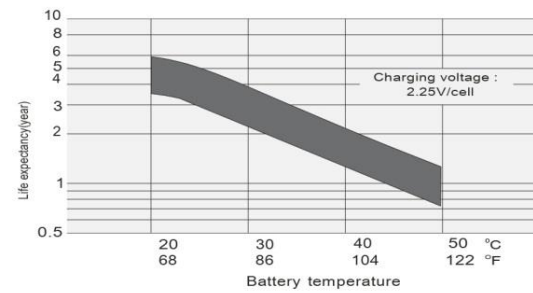

### Cycle Life in Relation to Depth of Discharge

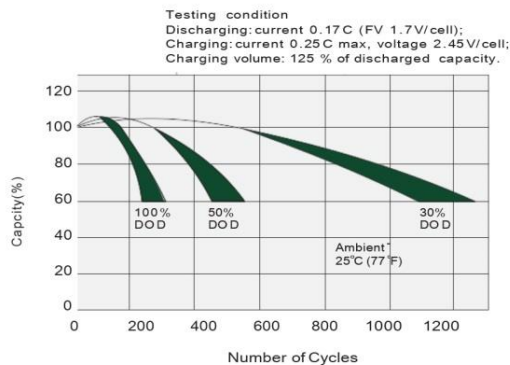

### Self Discharge Characteristics

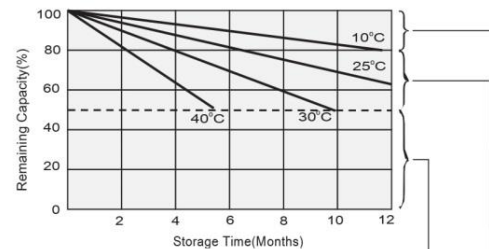

Supplementary charge may often fail to recover the capacity. The battery should never be left standing till this is reached.

Supplementary charge required before use. Optional charging way as below:  
1. Charged for above 3 days at limited current 0.25CA and constant voltage 2.25V/cell.  
2. Charged for above 20 hours at limited current 0.25CA and constant voltage 2.45V/cell.  
3. Charged for 8-10 hours at limited current 0.05CA.

No supplementary charge required  
(Carry out supplementary charge before use if 100% capacity is required.)